

Peristaltic Pump Accessories

A Filling Nozzle

Name	Material	Picture
Reducer anti-splash filling nozzle	SS316	
Flat filling nozzle	SS304/316	

B One Way Checkvalve



Avoid liquid drop off after filling and transferring.

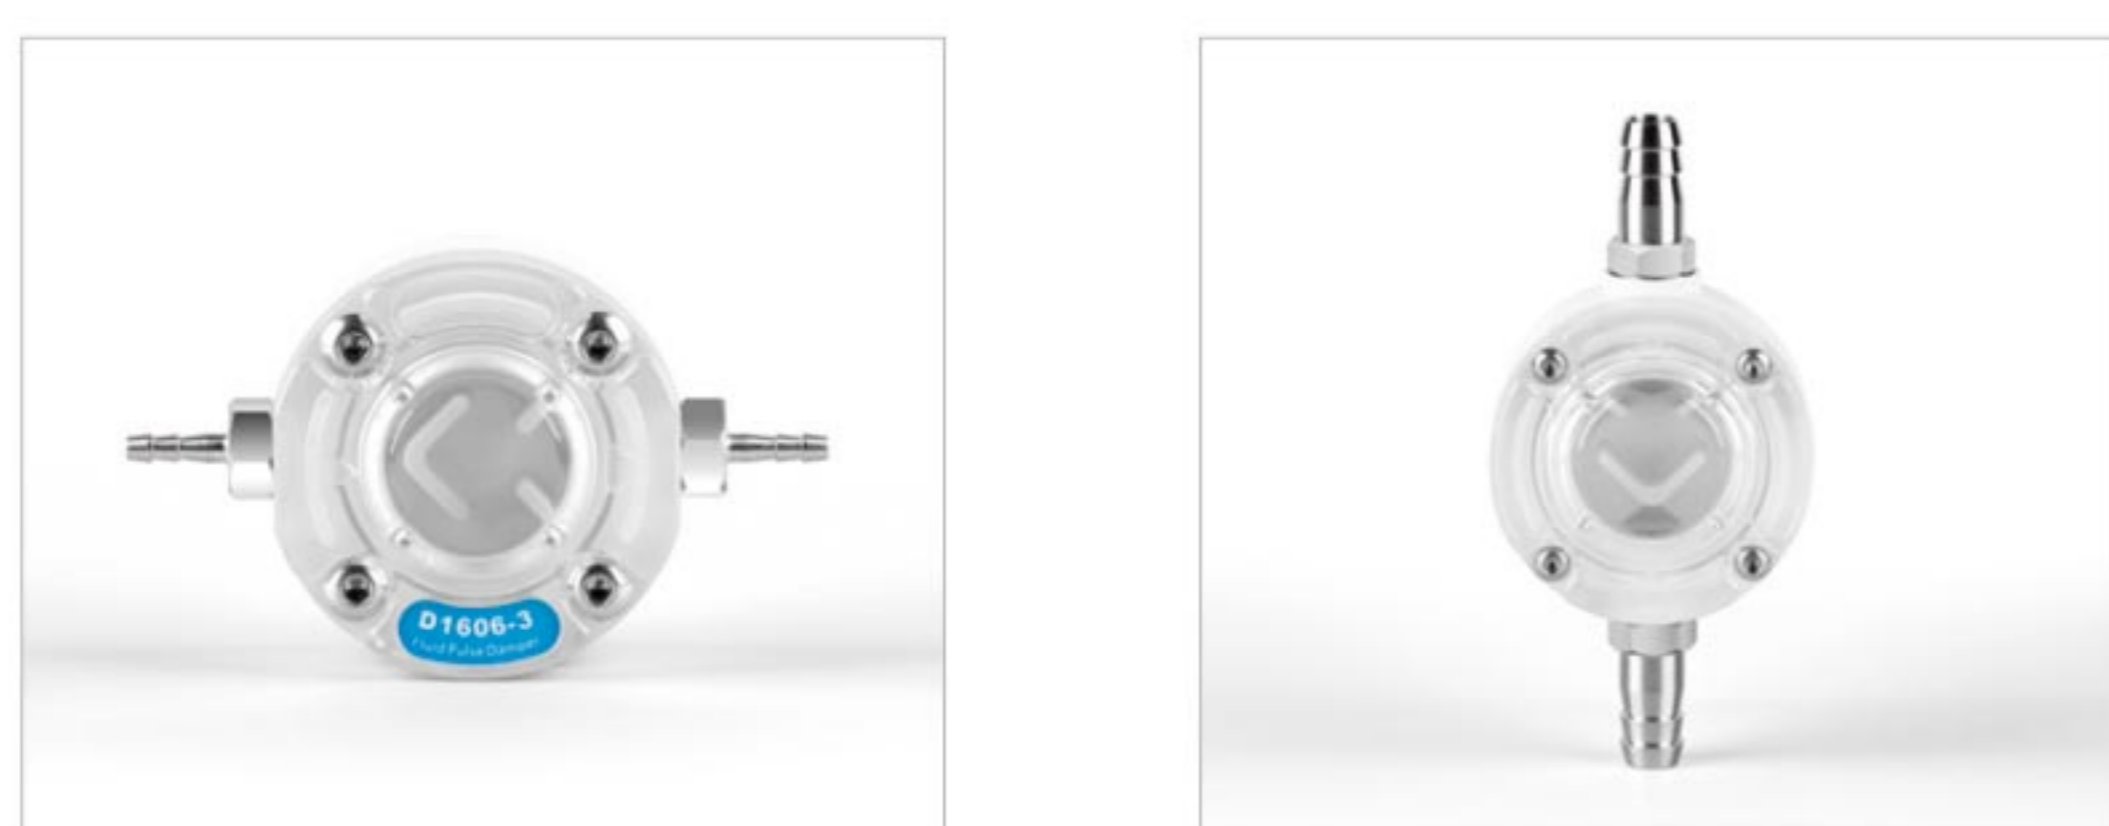
C Filling Countersunk



Used for the output of tube, preventing the tube floating or absorbing the wall of container.

Name	Material	Tube
Counter sunk	304/316 stainless steel	13#, 14#, 19#, 16#, 25#, 17#, 18#, 15#, 24#, 35#, 36#, 26#, 73#, 82#










D Fluid Pulse Damper



Special design for peristaltic pump, effectively suppress the peristaltic pump pulsation and improve the flow rate accuracy. The pulsation suppression rate can reach more than 95%.

E Handling Dispenser



Filling nozzle and tubing cap			
Filling nozzle size	13#	14#	19#
Inner diameter	3mm	3.5mm	4.5mm
Picture			
Filling nozzle size	16#	15#/25#	17#/24#
Inner diameter	5mm	7mm	9mm
Picture			
Tubing size	17#	18#	Plum blossom cap
Inner diameter	9.6mm	11.1mm	
Picture			

Based on ergonomics design, elegant appearance, grip feeling comfortable, easy operation. Connect to peristaltic pump external control interface, with start/stop and full speed control, can realize transferring and dispensing function. Power supply and working indicator, show the dispenser working status. With hanging hole, can be hang up when do not use.

F Foot Pedal Switch



Control the pump start/stop with foot pedal switch.



G Tube Connector



a Straight tube connector



b "Y" tube connector



c Tee tube connector



d Reducer tube connector



e "L" tube connector



f Flexible/Hard tube connector

H PH Controller



Work with peristaltic pump, can control the liquid PH value,

add acid or alkali automatically.

Function:

1. Liquid: Acid-Base Solutions
2. PH value : 0-14PH
3. Set up target PH value
4. Add acid or alkali liquid automaticall
5. Control: RS485 , 4-20mA
6. Power supply: DC24V (AC220V for option)
7. Suitable temperature: 0-60°C

I 5V Sensor



When applied in the dispensing line, it can detect whether there is filling bottle in the production line. When the bottle approach the sensor side, the switch action will be made without any mechanical contact or pressure, thereby providing filling control order to the pump. In the same way, when no filling bottle is detected, the stop filling control order is provided to the pump.

J Benchtop Tubing Cutter



Stainless steel blade, makes right-angle cuts in several sizes of plastic tubing.

K Support Stand













The multiple filling stand is suitable for more than 2 channels filling. It can hold 2-8 filling nozzles. We can customize the suitable one according to your request.





















Peristaltic Pump Tubing

Silicone Tubing

- Platinum-cured silicone tubing
- Slightly clarity, smooth surface, low protein binding levels, fewer potential leachable .
- Ideal for pharmaceutical and biotechnology use, suitable temperature range $-51\sim 238\text{ }^{\circ}\text{C}$.

Micro Flow Rate Tubing										
Tubing Size	0.13×0.86	0.5×0.86	0.86×0.86	1.52×0.86	2.06×0.86	2.79×0.86	1×1	2×1	3×1	2.4×0.8
Tubing cross sections (1:1)										
Wall thickness (mm)	0.86						1.0		0.8	
Inside diameter (mm)	0.13	0.5	0.86	1.52	2.06	2.79	1.0	2.0	3.0	2.4
Maximum pressure (Mpa)	Continuous	0.1								
	Intermittent	0.1								

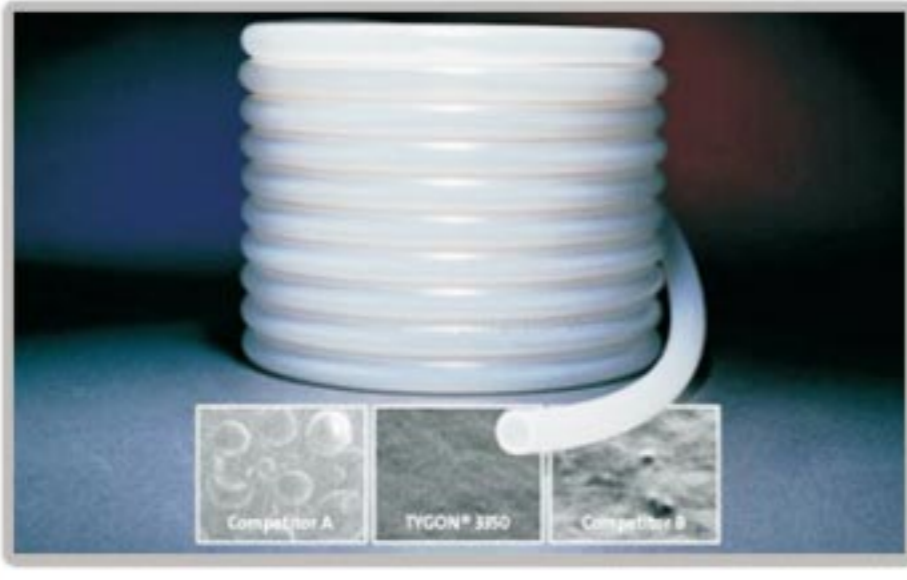




Basic Flow Rate Tubing												
Tubing Size	13 [#]	14 [#]	19 [#]	16 [#]	25 [#]	17 [#]	18 [#]	15 [#]	24 [#]	35 [#]	36 [#]	
Tubing cross sections (1:1)												
Wall thickness	mm	1.6						2.4				
	inch	1/16						3/32				
Inside diameter	mm	0.8	1.6	2.4	3.2	4.8	6.4	7.9	4.8	6.4	7.9	9.6
	inch	1/32	1/16	3/32	1/8	3/16	1/4	5/16	3/16	1/4	5/16	3/8
Maximum pressure (Mpa)	Continuous	0.17			0.14	0.1	0.07	0.17		0.14		
	Intermittent	0.27			0.24	0.14	0.1	0.27		0.24		

Industrial Tubing								
Tubing Size	26 [#]	73 [#]	82 [#]	86 [#]	90 [#]	88 [#]	92 [#]	
Tubing cross sections (1:1)								
Wall thickness	mm	3.3			6.4		4.8	
	inch	1/8			1/4		3/16	
Inside diameter	mm	6.4	9.6	12.7	9.5	19	12.7	25.4
	inch	1/4	3/8	1/2	3/8	3/4	1/2	1
Maximum pressure (Mpa)	Continuous	0.2			0.25			
	Intermittent	0.27			0.3			



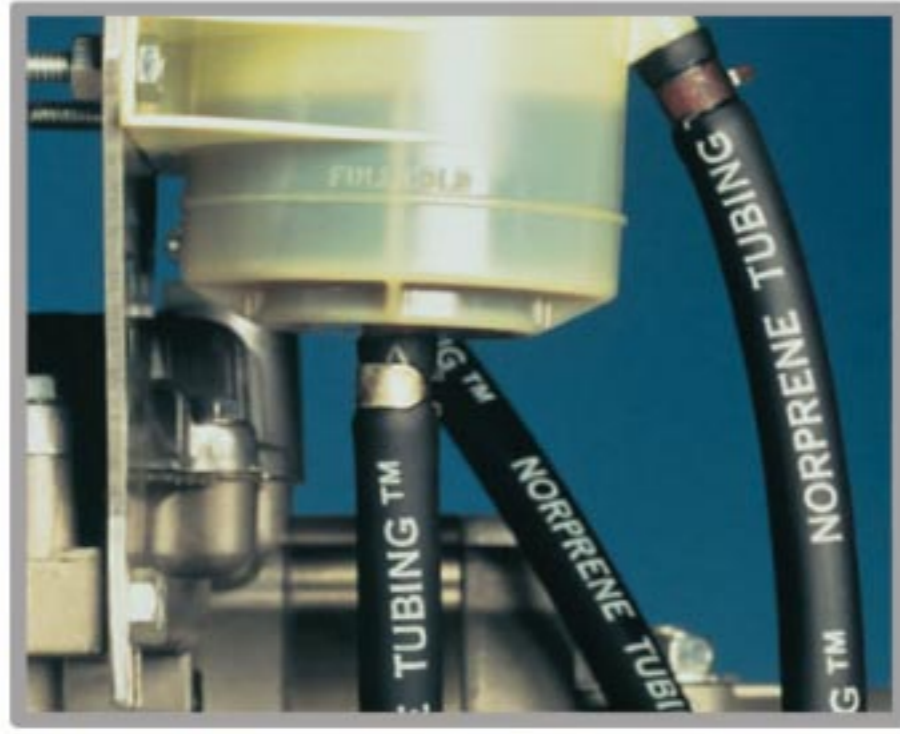
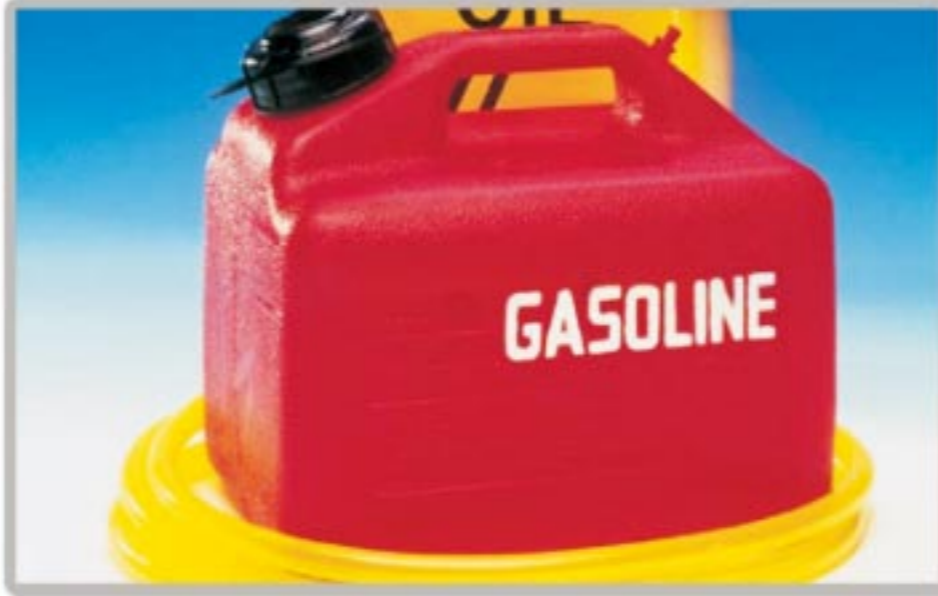

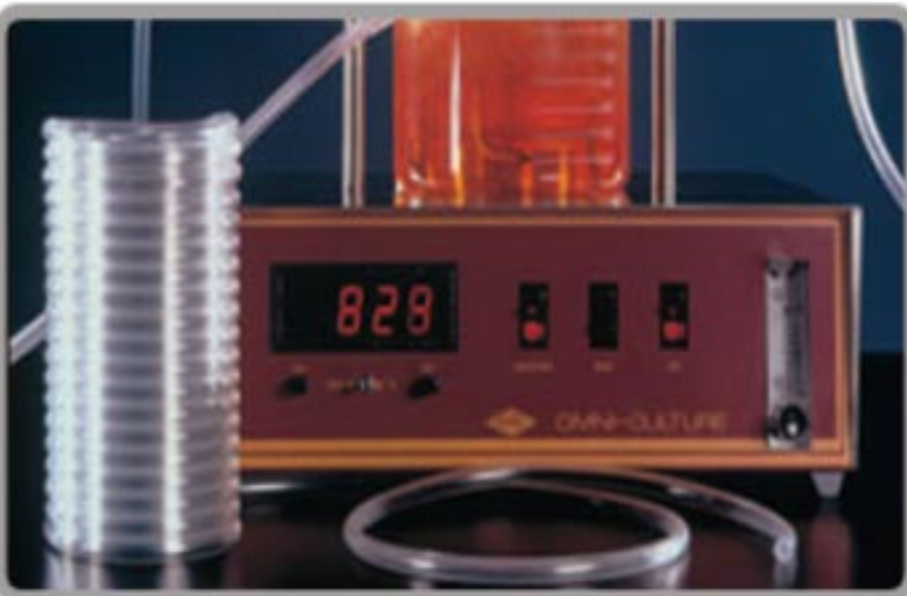

Peristaltic Pump Tubing

SAINT-GOBAIN Tubing: Tygon, PharMed BPT, Norprene etc

	A Tygon3350	B Tygon E-3603	C Norprene Chemical	D PharMed	E Norprene A-60-F																												
																																	
Formulation	Tygon3350	Tygon R-3603	Norprene Chemical	PharMed	Norprene A-60-F																												
Application	Pharmaceutical, cosmetic, medical and auto-analysis application.	General laboratory, food & beverage, biopharmaceutical, analytical instruments.	Excellent for chemical processing and general industrial applications. Food and beverage applications where extractables are a concern.	Cell and tissue culture work and pharmaceutical uses. Also good for light-sensitive samples.	Ideal for the food, dairy and beverage.																												
Advantages	Ultra-smooth; minimizes bacterial growth. Good for mild to medium concentration bases, salts and alcohols; odorless, tasteless, and nontoxic. Transparent.	Inexpensive tubing for general lab application. Nonaging, nonoxidizing. Clear for easy flow monitoring. Handles virtually all inorganic chemicals. Low gas permeability. Smooth bore; good for viscous fluids. High dielectric constant.	Norprene thermoplastic elastomer outer jacket with chemically inert Tygon® 2075 inner bore for excellent chemical resistance. Plasticizer-free to guard against extractables. Long flex life. Opaque beige.	Great for tissue and cell work-nontoxic and nonhemolytic; long service life minimizes risk of fluid exposure; reduces tubing costs and pump downtime. Opaque to UV and visible light to protect light-sensitive fluids. Heat sealable, bondable, and formable. Extremely low gas permeability.	Heat, ozone, and UV light resistant. Nonaging; nonoxidizing; superior acid and alkali resistance. Opaque beige.																												
Application Suitability	—————	<table border="0"> <tr><td>ACIDS</td><td>GOOD</td></tr> <tr><td>ALKALIES</td><td>GOOD</td></tr> <tr><td>ORGANIC SOLVENTS</td><td>NO</td></tr> <tr><td>PRESSURE</td><td>GOOD</td></tr> <tr><td>VACUUM</td><td>GOOD</td></tr> <tr><td>VISCOUS FLUIDS</td><td>EXCELLENT</td></tr> <tr><td>STERILE FLUIDS</td><td>GOOD</td></tr> </table>	ACIDS	GOOD	ALKALIES	GOOD	ORGANIC SOLVENTS	NO	PRESSURE	GOOD	VACUUM	GOOD	VISCOUS FLUIDS	EXCELLENT	STERILE FLUIDS	GOOD	—————	<table border="0"> <tr><td>ACIDS</td><td>GOOD</td></tr> <tr><td>ALKALIES</td><td>GOOD</td></tr> <tr><td>ORGANIC SOLVENTS</td><td>NO</td></tr> <tr><td>PRESSURE</td><td>GOOD</td></tr> <tr><td>VACUUM</td><td>EXCELLENT</td></tr> <tr><td>VISCOUS FLUIDS</td><td>GOOD</td></tr> <tr><td>STERILE FLUIDS</td><td>EXCELLENT</td></tr> </table>	ACIDS	GOOD	ALKALIES	GOOD	ORGANIC SOLVENTS	NO	PRESSURE	GOOD	VACUUM	EXCELLENT	VISCOUS FLUIDS	GOOD	STERILE FLUIDS	EXCELLENT	—————
ACIDS	GOOD																																
ALKALIES	GOOD																																
ORGANIC SOLVENTS	NO																																
PRESSURE	GOOD																																
VACUUM	GOOD																																
VISCOUS FLUIDS	EXCELLENT																																
STERILE FLUIDS	GOOD																																
ACIDS	GOOD																																
ALKALIES	GOOD																																
ORGANIC SOLVENTS	NO																																
PRESSURE	GOOD																																
VACUUM	EXCELLENT																																
VISCOUS FLUIDS	GOOD																																
STERILE FLUIDS	EXCELLENT																																
Physical characteristics	—————	Thermoplastic. PVC-based material with plasticizer. Firm (stiff) material. Transparent, clear.	—————	Thermoplastic elastomer. Polypropylene-based material with USP mineral oil. Excellent tensile strength. Firm (stiff) material. Opaque, beige.	—————																												
Temp. range	-75 to 450° F (-60~232° C)	-58 to 165° F (-50~74° C)	-76 to 165° F (-60~74° C)	-60 to 270° F (-59~135° C)	-60 to 275° F (-51~135° C)																												
Meets classifications	FDA 21 CFR 177.2600 USP Class VI EP 3.1.9. Exceeds 3A standards Manufactured according to GMP.	FDA 21 CFR 175.300	None.	None.	FDA 21 CFR 177.2600 NSF listed (Standard 51) Manufactured according to GMP.																												
Cleaning/ Sterilization	Ethylene oxide gamma irradiation, or autoclave for 30 min, 15psi (1 bar).	Unaffected by commercial sanitizers (with recommended procedures) Sterilize with ethylene oxide (ETO) or autoclave. To autoclave: Coil loosely in nonlinting cloth or paper, autoclave at 121°C (250°F). 1KG/cm ³ (15psi) for 30 minutes (tubing will appear milky); air dry at max 66°C (150°F) for 2 to 2 ½ hours until clear.	Sterilize with ethylene oxide (ETO), autoclave or gamma irradiation up to 2.5Mrad. Repeated autoclaving will not affect overall life.	Autoclave, ethylene oxide, or gamma irradiation.	Autoclave.																												



Peristaltic Pump Tubing

	F Norprene A-60-G	G Tygon F-4040-A	H Tygon LFL	I TYGON 2475	K Viton																																										
																																															
Formulation	Norprene A-60-G	Tygon F-4040-A	Tygon LFL	TYGON 2475	Viton																																										
Application	For applications requiring excellent chemical, heat, ozone, and ultra-violet (UV) light resistance.	Fuels and industrial lubricants-gasoline, kerosene, heating oils, cutting compounds, and glycol-based coolants. Resists most hydrocarbons.	General laboratory use, provides longer life with peristaltic tubing pumps.	Sensitive fluid transfer applications requiring high purity.	Acid and solvent transfer, high-temperature.																																										
Advantages	Best choice for vacuum/pressure applications. Offers longest life with good flow consistency. Heat and ambient ozone resistant. Good resistance to acids/alkalies. Black color hides dirt and dust. Heat sealable, nonaging, and nonoxidizing. High dielectric constant.	Resists embrittlement and swelling, ozone-and UV-resistant, with low-extractability. Translucent yellow.	Longest life of all Tygon® peristaltic tubing (1000hrs). Nonaging, nonoxidizing. Clear for easy flow monitoring. Broad chemical resistance; low gas permeability. Smooth bore. Good for viscous fluids. High dielectric constant.	Plasticizer free, smooth inner surface (inhibits particulate buildup and bacterial growth), safely disposed of through incineration and nontoxic. Transparent.	The most chemical resistant tubing. Resistant to corrosives, solvents, and oils at elevated temperatures. Low gas permeability.																																										
Application Suitability	<table border="0"> <tr><td>ACIDS</td><td>GOOD</td></tr> <tr><td>ALKALIES</td><td>GOOD</td></tr> <tr><td>ORGANIC SOLVENTS</td><td>NO</td></tr> <tr><td>PRESSURE</td><td>EXCELLENT</td></tr> <tr><td>VACUUM</td><td>EXCELLENT</td></tr> <tr><td>VISCOUS FLUIDS</td><td>EXCELLENT</td></tr> <tr><td>STERILE FLUIDS</td><td>NO</td></tr> </table>	ACIDS	GOOD	ALKALIES	GOOD	ORGANIC SOLVENTS	NO	PRESSURE	EXCELLENT	VACUUM	EXCELLENT	VISCOUS FLUIDS	EXCELLENT	STERILE FLUIDS	NO	—————	<table border="0"> <tr><td>ACIDS</td><td>GOOD</td></tr> <tr><td>ALKALIES</td><td>GOOD</td></tr> <tr><td>ORGANIC SOLVENTS</td><td>NO</td></tr> <tr><td>PRESSURE</td><td>GOOD</td></tr> <tr><td>VACUUM</td><td>GOOD</td></tr> <tr><td>VISCOUS FLUIDS</td><td>EXCELLENT</td></tr> <tr><td>STERILE FLUIDS</td><td>POOR</td></tr> </table>	ACIDS	GOOD	ALKALIES	GOOD	ORGANIC SOLVENTS	NO	PRESSURE	GOOD	VACUUM	GOOD	VISCOUS FLUIDS	EXCELLENT	STERILE FLUIDS	POOR	—————	<table border="0"> <tr><td>ACIDS</td><td>EXCELLENT</td></tr> <tr><td>ALKALIES</td><td>EXCELLENT</td></tr> <tr><td>ORGANIC SOLVENTS</td><td>EXCELLENT</td></tr> <tr><td>PRESSURE</td><td>GOOD</td></tr> <tr><td>VACUUM</td><td>GOOD</td></tr> <tr><td>VISCOUS FLUIDS</td><td>GOOD</td></tr> <tr><td>STERILE FLUIDS</td><td>FAIR</td></tr> </table>	ACIDS	EXCELLENT	ALKALIES	EXCELLENT	ORGANIC SOLVENTS	EXCELLENT	PRESSURE	GOOD	VACUUM	GOOD	VISCOUS FLUIDS	GOOD	STERILE FLUIDS	FAIR
ACIDS	GOOD																																														
ALKALIES	GOOD																																														
ORGANIC SOLVENTS	NO																																														
PRESSURE	EXCELLENT																																														
VACUUM	EXCELLENT																																														
VISCOUS FLUIDS	EXCELLENT																																														
STERILE FLUIDS	NO																																														
ACIDS	GOOD																																														
ALKALIES	GOOD																																														
ORGANIC SOLVENTS	NO																																														
PRESSURE	GOOD																																														
VACUUM	GOOD																																														
VISCOUS FLUIDS	EXCELLENT																																														
STERILE FLUIDS	POOR																																														
ACIDS	EXCELLENT																																														
ALKALIES	EXCELLENT																																														
ORGANIC SOLVENTS	EXCELLENT																																														
PRESSURE	GOOD																																														
VACUUM	GOOD																																														
VISCOUS FLUIDS	GOOD																																														
STERILE FLUIDS	FAIR																																														
Physical characteristics	Thermoplastic elastomer. Polypropylene-based material with USP mineral oil. Excellent tensile strength. Firm (stiff) material. Opaque, black. Manufactured according to GMP.	—————	Thermoplastic. PVC-based material with plasticizer. Firm (stiff) material. Transparent, clear.	—————	Thermal set rubber. Viton B (67% fluorine) Firm (stiff) material Opaque, black. Manufactured according to GMP.																																										
Temp. range	-60 to 270° F (-59~135° C)	-35 to 165° F (-37~74° C)	-58 to 165° F (-50~74° C)	-94 to 125° F (-70~52° C)	-25 to 400° F (-32~205° C)																																										
Meets classifications	None.	Meets NSF-51 and 3A sanitary standards.	USP Class VI, FDA 21 CFR 175.300	FDA 21 CFR 177.1520, USP 23 Class VI, Manufactured according to GMP.	None.																																										
Cleaning/ Sterilization	Sterilize by autoclave only.	Not recommended.	Sterilize by ETO/autoclave. Coil loosely in nonlinting cloth or paper; autoclave at 250°F(121°C), 15 psi (1kg/cm ²), 30 minutes (tubing will appear milky); air dry at max 150°F (66°C) for 2 to 2 ½ hrs until clear.	Ethylene oxide or gamma irradiation.	Sterilization is not recommended.																																										

